
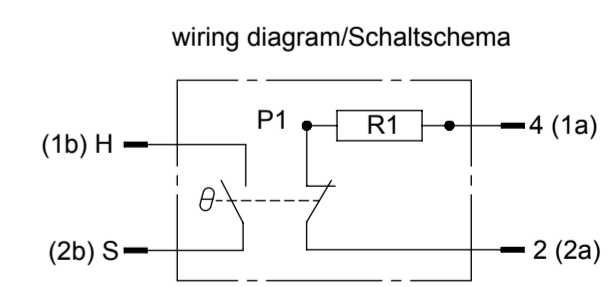


secure only by the spring embossed edge max. screw in deep 6mm thread end ISO 1478-form C
 Nur an der Randeinprägung federnd niederhalten
 max. Einschraubtiefe 6mm
 Gewinde ISO 1478-Form C

Limiter/Begrenzer
 60.25172.000
 max. permissible temperature at housing 250°C
 max. zulässige Temperatur am Gehäuse 250°C


adjustment/Justierung:
 glass surface temperature [T_o]
 CERAN HIGHTRANS eco
 Glasoberflächentemperatur [T_o]
 CERAN HIGHTRANS eco
 2 (2a) - 4 (1a) 540°C
 S (2b) - H (1b) out/Aus 65°C

A (1 : 1.5)

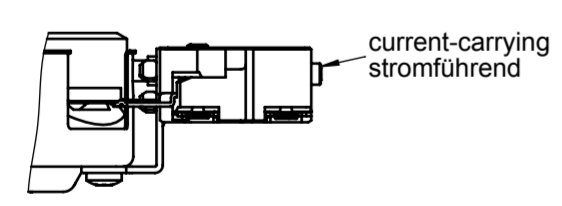

| | | | | | | | | | | |
|---|--------------|------|-----|------|--|--|--|--|---|---|
| 9 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 7 | | | | | | | | | | |
| 6 | 10.54111.006 | 1200 | 400 | 1200 | | | | | X | |
| 5 | 10.54111.005 | 1200 | 200 | 1200 | | | | | X | |
| 4 | 10.54111.004 | 1200 | 230 | 1200 | | | | | X | |
| 3 | 10.54111.003 | 1200 | 240 | 1200 | | | | | X | X |
| 2 | 10.54111.002 | 1100 | 220 | 1100 | | | | | X | |
| 1 | | | | | | | | | | |
| 0 | | | | | | | | | | |

| Pos | type Type | W wattage Leistung | V~ voltage Spannung | R1 | R2 | R3 | approval marks Prüfzeichen** | |
|-----|--------------|--------------------------|---------------------------|----|----|----|---------------------------------|--|
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |

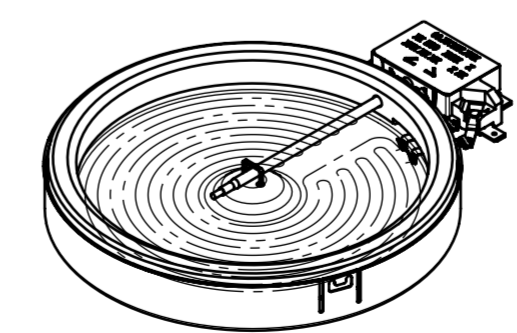

tolerance/Tolerierung ISO 8015

| | | | | | | | |
|---------------------------------------|-----------------|------------|--|---------------------------|--------------|------------------|-----------------|
| 6 | B03726 | 2016-12-09 | This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected. | Blank No. | EN Mat.No. | Scale Unit mm | |
| 5 | B03663 | 2016-10-17 | | Material | Scale 1:2 | | |
| 4 | B02837 | 2012-07-31 | | Surface Texture | ISO 1302 | | |
| 3 | B02627 | 2011-12-02 | | General Tolerances | ISO 2768-mH | | |
| 2 | B02521 | 2011-06-10 | | CAD | Date | Name | Designation |
| 1 | B02466 | 2011-01-25 | | Creat. | 2019-06-27 | JOHNE | EGO HiLight 140 |
| Cha. | Information No. | Date | Proc. | 2019-06-27 | JOHNE | EGO HiLight 140 | |
| F.Rel. | B02359 | 2010-11-05 | Rel. | 2019-07-16 | JOHNE | | |
| | | | | | | | |
| document id. 10.54111.001-901-08-A | | | | Stat. | Sheets | Doc. Ex.Doc. | |
| Origin | | | | Repl.for 10.54111.00X/901 | | Ref. | |
| 9 | | 10 | | 11 | | 12 | |