






>> FV122

Screw-to-Tab Terminal Block (6 poles)

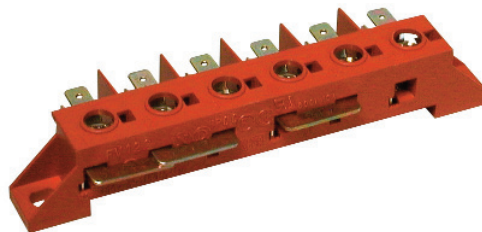


Technical data

	IEC STANDARDS	AMERICAN STANDARDS
Ratings	450V - 40A	600V - 40A
Wire size	6.0 sqmm	22 ÷ 8 AWG (20 lb/in)
Working Temperature	- 5 ÷ 150°C (short time 180°C)	23 ÷ 248°F
Plastic Material	Polyamide glass fibre reinforced, UL94 VO, GWIT 775°C, GWFI 850°C	
Metal Parts	M5 (2.0Nm) zinc plated steel captive screw; 6.3 x 0.8 zinc plated steel tab insert; Shunt insert and other parts made in zinc plated steel	
Marking	1 - 2 - 3 - 4 - 5 - 	
Accessories	PA269	

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	E2250	6.0 sqmm - 450V - 150°C	EN 60998-1; EN 60998-2-1
	E76048 vol. 1 sec. 4	22 ÷ 8 AWG - 600V - 40A - 120°C	UL 1059
	40455	22 ÷ 8 AWG - 600V - 40A	C22-2 N.158-1987; E.C.N 584B

Dimensional drawing

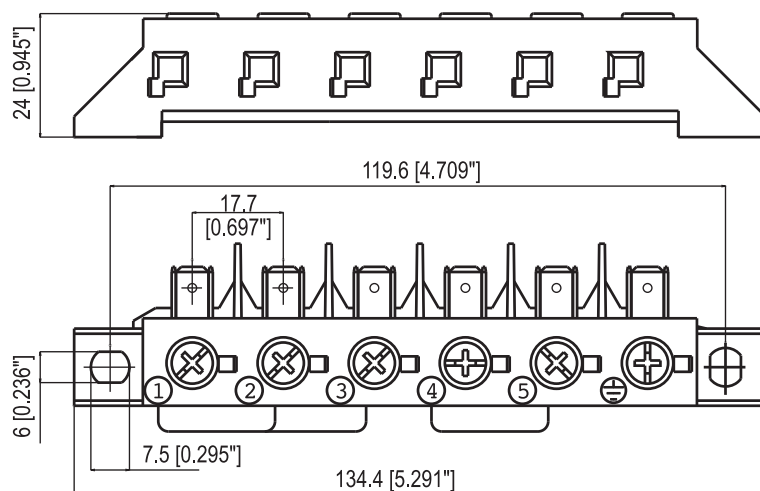

I dati tecnici possono essere modificati senza preavviso. / The technical data can be subject to changes without notice.

