
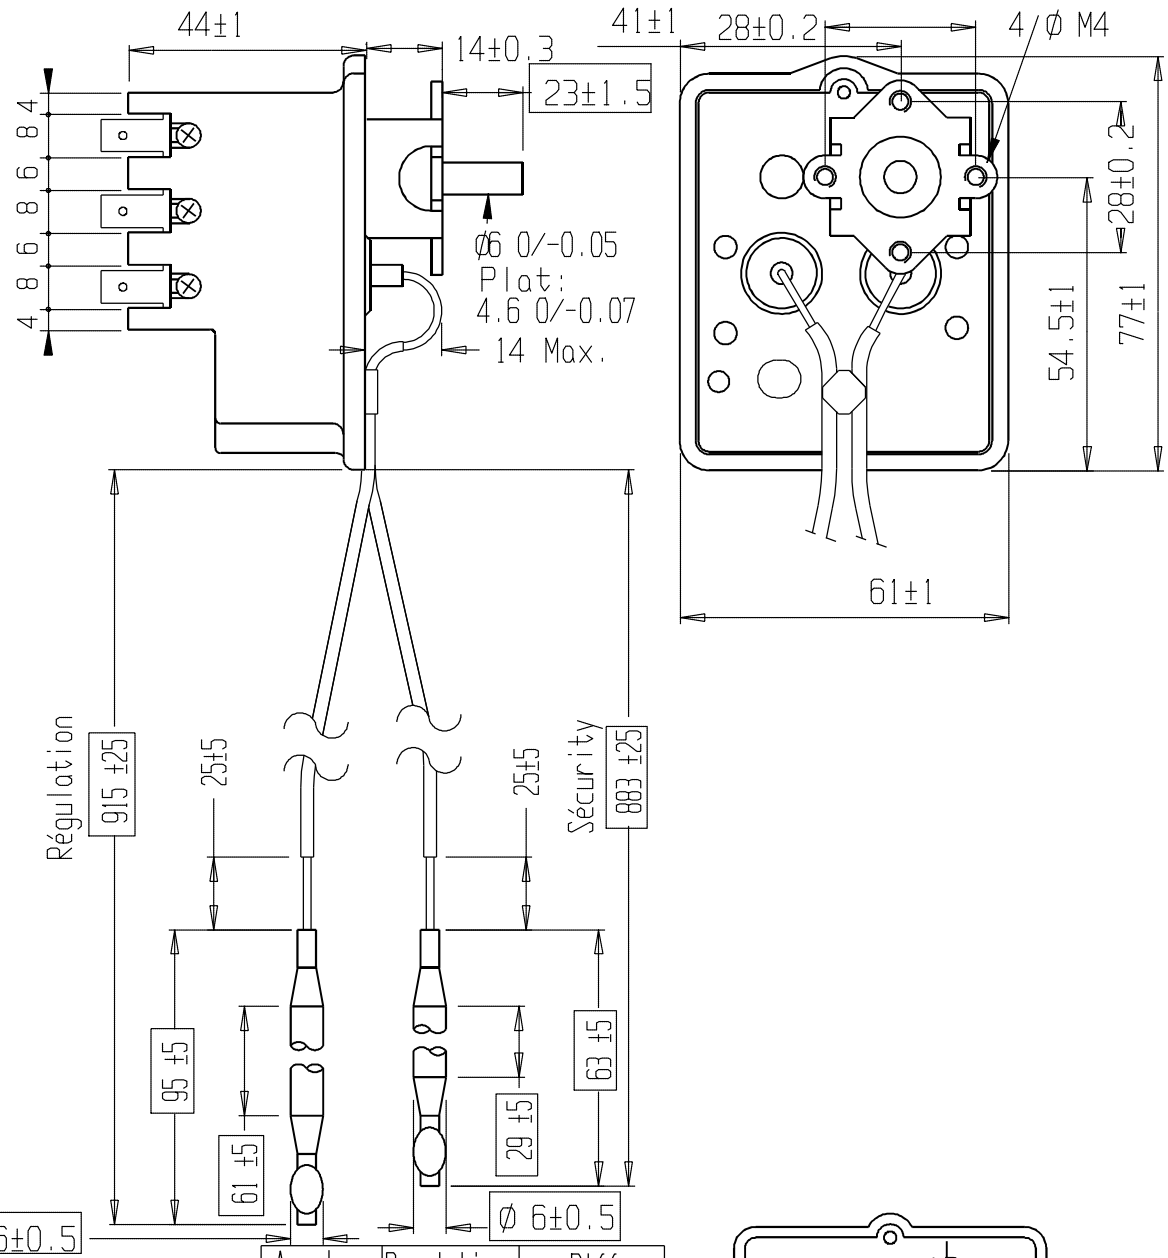




M.05

Connexions		
A		AMP Right 6.35
B		AMP Right 6.35

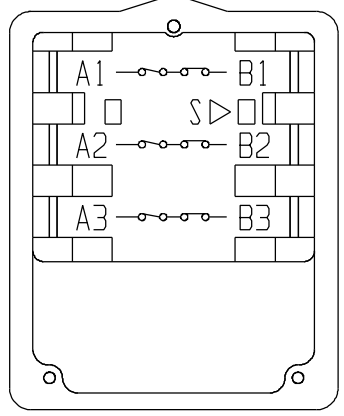

NORMS: Approvals DEMKO
 EN 60730-1 T 105
 EN 60730-2-9
 20A 240V ~
 15A 400V ~

	Angular pos/BB	Regulation (°C)	Diff. (°C)
X	0	≈ 15	
Y			
Z	270	85 ±4	Approx 9
Security			
Temp.(°C):		110 +0/-10	
Sub. length:		50 mm	

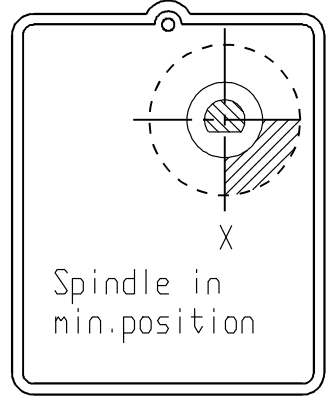

	Regulation	Security
Bulb:	Stain	Copper
Capillary:	Stain	Copper
Sleeving:	PER	PER
Maxi bulb temp:	108	185
Standard packaging		

Preset in position: X

a		22/03/11	L.G	24/03/11	B.R
REF.		DATE	VISA	ACCEPTED ON	VISA

G.T: ±	DESIGNATION THERMOSTAT THREE-POLE CONTROL AND SAFETY 20A 240V, 15A 400V	<i>COTHERM</i>
Scale: 1/1		
Drawn on: 20/11/02	By: D.M	BTS60112
Approved: 27/11/02	By: B.R	